arXiv:1203.1521v1 [cs.IT] 7 Mar 2012

# Near-oracle Recovery Performance of Greedy Pursuits with Replacement against General Perturbations

Laming Chen and Yuantao Gu

***Abstract*—Applying the theory of Compressive Sensing in practice always takes different kinds of perturbations into consideration. In this paper, the recovery performance of greedy pursuits with replacement is analyzed when both the measurement vector and the sensing matrix are contaminated with additive perturbations. Specifically, greedy pursuits with replacement include CoSaMP, SP and IHT algorithms, where the support estimation is evaluated and replaced in each iteration. Based on restricted isometry property, a unified form of the error bounds of these recovery algorithms is derived under general perturbations for compressible signals. Derived from the results, the recovery performance is stable against both perturbations. Also, these bounds are compared with that of oracle recovery—least squares solution with the locations of $K$ largest entries in magnitude known a priori. The comparison shows that these bounds only differ in coefficients from the lower bound of oracle recovery with some certain signal and perturbations, as reveals that near-oracle recovery performance of greedy pursuits with replacement is guaranteed. Numerical simulations are performed to verify the conclusions.**

***Index Terms*—Compressive sensing, sparse recovery, general perturbations, performance analysis, restricted isometry property, greedy pursuits, compressive sampling matching pursuit, subspace pursuit, iterative hard thresholding, oracle recovery.**

## I. INTRODUCTION

COMPRESSIVE sensing, or compressive sampling (CS) [1]–[3], is a novel signal processing technique proposed to effectively sample and compress sparse signals, i.e. signals that can be represented by few significant coefficients over certain basis. One of the essential issues of CS theory lies in recovering $N \times 1$ vector $\mathbf{x}$ from its linear observations,

$$\mathbf{y} = \mathbf{A}\mathbf{x}, \tag{1}$$

where $\mathbf{y}$ is an $M \times 1$ vector with $M < N$, $\mathbf{A}$ is an $M \times N$ sensing matrix, and $\mathbf{x}$ is assumed to be $K$-sparse, which means only $K$ out of its $N$ entries are nonzero. Unfortunately, directly finding the sparsest solution to (1) is NP-hard, which is not practical for sparse recovery. This leads to one of the major aspects of CS theory—designing effective recovery algorithms with low computational complexity and fine recovery performance.

### *A. Overview of Sparse Recovery Algorithms*

A family of convex relaxation algorithms for sparse recovery [4] had been introduced before the theory of CS was established. Based on linear programming (LP) techniques, it is shown that $\ell_1$ norm optimization, also known as basis pursuit (BP),

$$\min_{\mathbf{x}} \|\mathbf{x}\|_1 \quad \text{s.t.} \quad \mathbf{y} = \mathbf{A}\mathbf{x} \tag{2}$$

yields the sparest solution as long as $\mathbf{A}$ satisfies the restricted isometry property (RIP) with a constant parameter [5]–[7]. Recovery algorithms based on convex optimization include interior-point methods [8], [9] and homotopy methods [10], [11].

In contrast with convex relaxation algorithms, non-convex optimization algorithms solve (1) by minimizing $\ell_p$ norm with respect to $0 \le p < 1$, which is not convex. Typical algorithms include focal underdetermined system solver (FOCUSS) [12], iteratively reweighted least squares (IRLS) [13], smoothed $\ell^0$ (SL0) [14], and zero-point attracting projection (ZAP) [15]. Compared with convex relaxation algorithms, theoretical analysis based on RIP shows that fewer measurements are required for exact reconstruction by non-convex optimization methods [16].

A family of iterative greedy algorithms has received much attention due to their simple implementation and low computational complexity. The basic idea underlying these algorithms is to iteratively estimate the support set of the unknown sparse signal. In each iteration, one or more indices are added to the support estimation by correlating the columns of $\mathbf{A}$ with the regularized measurement vector. Typical examples include orthogonal matching pursuit (OMP) [17], regularized OMP (ROMP) [18], and stage-wise OMP (StOMP) [19]. Compared with convex relaxation algorithms, matching pursuits need more number of measurements, but they tend to be more computationally efficient.

Recently, several greedy pursuits including compressive sampling matching pursuit (CoSaMP) [20] and subspace pursuit (SP) [21] have been proposed by incorporating the idea of backtracking. In each iteration, SP algorithm refines the $K$ columns of matrix $\mathbf{A}$ that span the subspace where measurement vector $\mathbf{y}$ lies. Specifically, SP adds $K$ more indices to the $K$ candidates, and remaining the most reliable $K$ ones. Similarly, CoSaMP adds $2K$ more indices in each iteration, while computing the regularized measurement vector in a different way. By evaluating the reliability of all candidates

---

Laming Chen and Yuantao Gu are with the Department of Electronic Engineering, Tsinghua University, Beijing 100084, CHINA (e-mail: gyt@tsinghua.edu.cn).

This work was supported partially by the National Natural Science Foundation of CHINA (60872087 and U0835003) and Agilent Technologies Foundation # 2205.

in each iteration, these algorithms can provide comparable performance to convex relaxation algorithms, and exhibit low computational complexity as matching pursuit algorithms.

Another kind of greedy pursuits, including iterative hard thresholding (IHT) [22] and its normalized variation [23], is proposed with the advantages of low computational complexity and theoretical performance guarantee. In each iteration, the entries of the updated solution except for the most $K$ reliable ones are set to zero. Together with CoSaMP and SP, these algorithms can be considered as greedy pursuits with replacement involved in each iteration.

### B. Overview of Perturbation Analysis

To apply the theory of CS in practice, the effect of noise must be taken into consideration. The most common analysis is the additive noise to the measurements, i.e.

$$\tilde{\mathbf{y}} = \mathbf{y} + \mathbf{e}, \tag{3}$$

where $\mathbf{e}$ is termed measurement perturbation. Most existing algorithms have been proved to be stable from perturbed measurements, including theoretical analysis of BP [6], ROMP [24], SP [21], CoSaMP [20], and IHT [22], [23]. It is shown that the error bounds of the recovered solutions are proportional to the energy of measurement perturbation $\mathbf{e}$. A certain distribution of $\mathbf{e}$ can be introduced to achieve better results, such as Gaussian [25]–[28] or others [29], [30].

Until recently, only a few researches involve the perturbation to $\mathbf{A}$, which is also termed system perturbation. Representative researches include analysis of BP [31], CoSaMP [32], SP [33], $\ell_p$ norm optimization [34] with $0 < p \leq 1$, and OMP [35]. In their studies, (3) is extended by introducing a perturbed sensing matrix, i.e. $\tilde{\mathbf{A}} = \mathbf{A} + \mathbf{E}$. It is of great significance to analyze the stability of recovery algorithms against both perturbations when the theory of CS is applied in practice. Other related works include mismatch of sparsity basis [36] and sparsity-cognizant total least-squares [37].

Two practical scenarios are usually considered in CS applications. First, when $\mathbf{A}$ represents a system model, $\mathbf{E}$ denotes the precision error when the system is physically implemented. Thus the whole sensing process is

$$\tilde{\mathbf{y}} = (\mathbf{A} + \mathbf{E})\,\mathbf{x} + \mathbf{e}, \tag{4}$$

and only the nominal sensing matrix and contaminated measurement vector are available for recovery, i.e. $\hat{\mathbf{x}} = \mathrm{R}(\mathbf{A}, \tilde{\mathbf{y}})$, where $\mathrm{R}(\cdot)$ denotes a certain recovery algorithm.

In countless other problems, $\mathbf{E}$ is involved due to mismodeling of the system $\mathbf{A}$. Thus $\tilde{\mathbf{A}} = \mathbf{A} + \mathbf{E}$ and the sensing process is

$$\tilde{\mathbf{y}} = \mathbf{A}\mathbf{x} + \mathbf{e}. \tag{5}$$

Both the sensing matrix and measurement vector are contaminated, and the recovered solution is $\hat{\mathbf{x}} = \mathrm{R}(\tilde{\mathbf{A}}, \tilde{\mathbf{y}})$.

Available researches [31]–[33], [35] are all based on the latter scenario, thus (5) is well considered and fully analyzed in this paper. The first scenario (4) is briefly discussed after that as a remark.

### C. Our Work

This paper mainly considers the recovery performance of greedy pursuits with replacement against general perturbations. Specifically, when both measurement perturbation and system perturbation exist, the error bounds of the solutions of CoSaMP, SP and IHT are derived and discussed in detail for not strictly sparse signals, i.e. compressible signals. It is shown that the bounds of these greedy pursuits are proportional to the relative perturbations of both sensing matrix and measurement vector, which indicates that the recovery performance is stable against general perturbations. These error bounds are also compared with that of oracle recovery, and it is shown that the results in this paper are optimal up to the coefficients. Numerical simulations are performed to verify the conclusions in this paper. Previous and related works including [28], [32], [33] are introduced in Section VI.

The remainder of this paper is organized as follows. Section II gives a brief review of RIP and three greedy pursuits with replacement: CoSaMP, SP, and IHT. Section III presents the main theorems when greedy pursuits with replacement meet general perturbations, and the results are shown to be near-oracle by comparing with oracle recovery in Section IV. Numerical simulations are performed in Section V to verify the contributions in this paper. Several related works are discussed in Section VI, and the paper is concluded in Section VII.

## II. PRELIMINARY

In this section, the definition of RIP and descriptions of several greedy pursuits, including CoSaMP, SP, and IHT, as well as their recovery performance against measurement perturbation, are introduced.

### A. Restricted Isometry Property (RIP)

The restricted isometry property (RIP) for any matrix $\mathbf{A}$ describes the degree of orthogonality among its different columns.

**Definition 1** *For each integer $K = 1, 2, \ldots,$ define the restricted isometry constant (RIC) $\delta_K$ of a matrix $\mathbf{A}$ as the smallest non-negative number such that*

$$(1 - \delta_K)\left\|\mathbf{x}\right\|_2^2 \leq \left\|\mathbf{A}\mathbf{x}\right\|_2^2 \leq (1 + \delta_K)\left\|\mathbf{x}\right\|_2^2 \tag{6}$$

*holds for all $K$-sparse vectors $\mathbf{x}$.*

According to Definition 1, $\delta_K < 1$ implies that every $K$ columns of $\mathbf{A}$ are linearly independent, and $\delta_{2K} \ll 1$ implies that $\mathbf{A}$ almost maintains the $\ell_2$ distance between any pair of $K$-sparse signals. It is also easy to check that if $\mathbf{A}$ satisfies the RIP with $\delta_{K_1}$ and $\delta_{K_2}$, and $K_1 \leq K_2$, then $\delta_{K_1} \leq \delta_{K_2}$.

Calculating the exact value of RIC given a fixed matrix $\mathbf{A}$ is intractable because it involves all submatrices formed by taking $K$ columns of $\mathbf{A}$. Fortunately, random sensing matrices have small RICs for overwhelming probability. For example, if the entries of $\mathbf{A} \in \mathbb{R}^{M \times N}$ are independently and identically distributed Gaussian random variables of zero mean and variance $1/M$, and $M$ satisfies

$$M \geq \frac{CK\log\left(N/K\right)}{\varepsilon^2},$$

then $\delta_K \leq \varepsilon$ with at least probability $1 - \mathrm{e}^{-cM}$, where $C$ and $c$ are two constants [5], [20]. Recent results about the bounds of RIC can be found in [38], [39].

Though RIP is usually used to show the impact of sensing matrix on sparse signals, the following lemma permits us to generalize the results for sparse signals to general signals.

**Lemma 1** *(Proposition 3.5 in [20]) Suppose the sensing matrix* $\mathbf{A}$ *satisfies RIP of sparsity level* $K$ *with* $\delta_K$*, then for every signal* $\mathbf{x} \in \mathbb{R}^N$*, it holds that*

$$\|\mathbf{A}\mathbf{x}\|_2 \leq \sqrt{1+\delta_K}\left(\|\mathbf{x}\|_2 + \frac{1}{\sqrt{K}}\|\mathbf{x}\|_1\right). \tag{7}$$

Lemma 1 is used in the following analysis for compressible signals.

### *B. Greedy Pursuits with Replacement*

Greedy pursuits with replacement include CoSaMP, SP, and IHT algorithms, and they are briefly introduced as follows.

The CoSaMP algorithm iteratively refines the support of $K$-sparse vector $\mathbf{x}$. In each iteration of CoSaMP, $2K$ more indices are selected by correlating $\mathbf{A}$ with residue vector $\mathbf{r}$, then the best $K$ candidates out of at most $3K$ ones are remained and the residue vector is updated. The details of CoSaMP can be found in [20].

The SP algorithm is firstly proposed in [40] and further developed in [21]. It iteratively refines the $K$ columns that span the subspace where the measurement vector $\mathbf{y}$ belongs. Unlike CoSaMP, SP adds $K$ more indices in each iteration, and remains the best $K$ candidates. In addition, the regularized measurement vector of SP is orthogonal to the subspace spanned by the columns of $\mathbf{A}$ indexed by the $K$ candidates, making the new $K$ indices added in each iteration totally different from previously identified $K$ ones. Please refer to [21] for more details.

The IHT algorithm is firstly proposed in [41], and later developed and analyzed in [22]. To guarantee the convergence of the method, a normalized variation NIHT is proposed in [23] which retains theoretical performance guarantee similar to IHT. Without loss of generality, only IHT algorithm is discussed in the following.

The following Theorem 1 reveals the error bound of the solution of greedy pursuits with replacement when only measurement perturbation exists.

**Theorem 1** *Given a perturbed measurement vector* $\tilde{\mathbf{y}} = \mathbf{A}\mathbf{x} + \mathbf{e}$ *where* $\mathbf{x}$ *is* $K$*-sparse, the estimated solution* $\mathbf{x}^{[l]}$ *in the* $l$*-th iteration of CoSaMP and IHT algorithms satisfies*

$$\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2 \leq C\left\|\mathbf{x} - \mathbf{x}^{[l-1]}\right\|_2 + C_1\|\mathbf{e}\|_2, \tag{8}$$

*and the estimated support set* $\mathrm{T}^l$ *in the* $l$*-th iteration of SP algorithm satisfies*

$$\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^l}\|_2 \leq C\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^{l-1}}\|_2 + C_1\|\mathbf{e}\|_2, \tag{9}$$

*where* $\mathrm{T}$ *denotes the support of* $\mathbf{x}$*, i.e. the set of locations of nonzero entries of* $\mathbf{x}$*,* $\mathrm{T} - \mathrm{T}^l$ *denotes the set comprised of* $x \in \mathrm{T}$ *and* $x \notin \mathrm{T}^l$*, and* $\mathbf{x}_{\mathrm{T}}$ *denotes the subvector composed of entries of* $\mathbf{x}$ *indexed by set* $\mathrm{T}$.

*Furthermore, if the sensing matrix* $\mathbf{A}$ *satisfies* $\delta_{bK} \leq c$*, then* $C < 1$*, and it can be derived that*

$$\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2 \leq aC^l\|\mathbf{x}\|_2 + D\|\mathbf{e}\|_2 \tag{10}$$

*holds for greedy pursuits with replacement. The specific values of the constants* $a$*,* $b$*,* $c$*,* $C < 1$*,* $C_1$ *and* $D$ *are illustrated in TABLE I.*

TABLE I
THE SPECIFICATION OF THE CONSTANTS

| | CoSaMP | SP | IHT |
|---|---|---|---|
| $a$ | 1 | 1.26 | 1 |
| $b$ | 4 | 3 | 3 |
| $c$ | 0.171 | 0.206 | 0.353 |
| $C$ | $\frac{4\delta_{4K}}{(1-\delta_{4K})^2}$ | $\frac{2\delta_{3K}+2\delta_{3K}^2}{(1-\delta_{3K})^3}$ | $\sqrt{8}\delta_{3K}$ |
| $C_1$ | $\frac{6+2\delta_{4K}}{(1-\delta_{4K})^2}$ | $\frac{4(1+\delta_{3K})}{(1-\delta_{3K})^2}$ | $2\sqrt{1+\delta_K}$ |
| $D$ | $\frac{6+2\delta_{4K}}{1-6\delta_{4K}+\delta_{4K}^2}$ | $\frac{5-4\delta_{3K}-8\delta_{3K}^2-\delta_{3K}^4}{1-6\delta_{3K}+6\delta_{3K}^2-2\delta_{3K}^3+\delta_{3K}^4}$ | $\frac{2+\delta_{3K}}{1-\sqrt{8}\delta_{3K}}$ |

*Proof:* For CoSaMP algorithm, inequality (8) can be obtained by following the steps of proof of Theorem 4.1 in [20], except for preserving RICs during the derivation. By recursion, inequality (10) can be proved from (8). For SP algorithm, the result cannot be directly found in [21]. However, it can be proved based on several facts about SP algorithm in [21], and the proof is provided in Appendix A. For IHT algorithm, inequality (8) is derived in the proof of Theorem 5 in [22], and inequality (10) can be proved by recursion. ■

### *C. Discussion*

Now we have introduced three greedy pursuits: CoSaMP, SP, and IHT, where sparsity level $K$ needs to be known a priori for replacement. According to (10), it can be concluded that when only measurement perturbation exists, the error bounds of them are exponential decay function of iteration number, and the limit of these error bounds is proportional to the energy of perturbation. Two remarks based on (10) are derived as follows, and the main conclusions in this paper are based on (10) as well.

**Remark 1** When no perturbation exists, then after finite iterations, the recovery solutions of CoSaMP and SP are guaranteed to be identical to the original signal $\mathbf{x}$. The result can be verified through the following statement.

Suppose $x_{\min}$ is the smallest magnitude of the nonzero entries of $\mathbf{x}$. Then after

$$l = \left\lfloor \log_C\left(\frac{x_{\min}}{a\|\mathbf{x}\|_2}\right)\right\rfloor + 1$$

iterations, the recovery solution $\mathbf{x}^{[l]}$ obeys

$$\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2 < x_{\min}. \tag{11}$$

If the support is perfectly recovered, then for CoSaMP and SP, the solution is already identical to the original signal. Otherwise, at least one nonzero entry is not detected, thus the recovery error is no less than $x_{\min}$, which contradicts (11). Notice that the solution of IHT does not have the above property, since exact support recovery does not imply exact signal recovery.

**Remark 2** According to (10), after

$$l = \left\lceil \log_C \left( \frac{\|\mathbf{e}\|_2}{a\,\|\mathbf{x}\|_2} \right) \right\rceil$$

iterations, the error bound of the recovery solution satisfies

$$\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2 \le (D+1)\,\|\mathbf{e}\|_2\,, \tag{12}$$

which means that error bound is proportional to the energy of perturbation, and the recovery performance of greedy pursuits with replacement is stable against measurement perturbation.

It needs to be emphasized that the above analysis is performed as worst-case, and the demands of RICs of sensing matrix are sufficient conditions. Better recovery performance of the three algorithms is normally achieved in practice, thus they are widely used in various applications.

## III. RECOVERY PERFORMANCE OF GREEDY PURSUITS WITH REPLACEMENT

In this section, the error bounds of greedy pursuits with replacement are derived for general signals when both measurement perturbation and system perturbation exist.

### A. Notations and Assumptions

Several notations and assumptions are stated first and they will be used in the following analysis. The original signal $\mathbf{x}$ is assumed to be compressible signal in the following context, which means that it can be well approximated by a sparse signal. $\mathbf{x}_\mathrm{T}$ denotes the subvector composed of entries of $\mathbf{x}$ indexed by set T. $\mathbf{A}_\mathrm{T}$ denotes the submatrix composed of the columns of $\mathbf{A}$ indexed by set T. $\mathbf{A}^\dagger$ denotes the pseudo-inverse of a tall, full-rank matrix $\mathbf{A}$ by $\mathbf{A}^\dagger = (\mathbf{A}^*\mathbf{A})^{-1}\mathbf{A}^*$. Vector $\mathbf{x}_K$ is assumed to be the best $K$-term approximation to $\mathbf{x}$, and define the approximation error $\mathbf{x}_K^c = \mathbf{x} - \mathbf{x}_K$. The approximation error can be quantified as

$$r_K = \frac{\|\mathbf{x}_K^c\|_2}{\|\mathbf{x}\|_2}, \quad s_K = \frac{\|\mathbf{x}_K^c\|_1}{\sqrt{K}\,\|\mathbf{x}\|_2}. \tag{13}$$

When the original signal $\mathbf{x}$ is $K$-sparse, the ratios $r_K = s_K = 0$. If $\mathbf{x}$ is compressible, then for reasonable $K$, the ratios $r_K$ and $s_K$ are expected to be far less than 1.

The symbol $\|\mathbf{A}\|_2$ denotes the spectral norm of a matrix $\mathbf{A}$, and the symbol $\|\mathbf{A}\|_2^{(K)}$ denotes the largest spectral norm taken over all $K$-column submatrices of $\mathbf{A}$. The measurement perturbation $\mathbf{e}$ and system perturbation $\mathbf{E}$ can be quantified with the following relative bounds:

$$\frac{\|\mathbf{e}\|_2}{\|\mathbf{y}\|_2} \le \varepsilon_\mathbf{y}, \quad \frac{\|\mathbf{E}\|_2}{\|\mathbf{A}\|_2} \le \varepsilon_\mathbf{A}, \quad \frac{\|\mathbf{E}\|_2^{(K)}}{\|\mathbf{A}\|_2^{(K)}} \le \varepsilon_\mathbf{A}^{(K)}, \tag{14}$$

where $\|\mathbf{y}\|_2$, $\|\mathbf{A}\|_2$, $\|\mathbf{A}\|_2^{(K)} \neq 0$. $\varepsilon_\mathbf{y}$ quantifies the relative measurement perturbation, while $\varepsilon_\mathbf{A}$ and $\varepsilon_\mathbf{A}^{(K)}$ quantifies the relative system perturbation. In practical scenarios, the exact forms of $\mathbf{e}$ and $\mathbf{E}$ are not known in advance, thus the relative upper bounds are applied instead. In this paper, $\varepsilon_\mathbf{y}$, $\varepsilon_\mathbf{A}$, $\varepsilon_\mathbf{A}^{(K)}$ are assumed less than 1.

The following lemma quantifies the RIC of the perturbed sensing matrix $\tilde{\mathbf{A}} = \mathbf{A} + \mathbf{E}$.

**Lemma 2** *(Theorem 1 in [31]) Assume the sensing matrix $\mathbf{A}$ satisfies RIP of sparsity level $K$ with $\delta_K$, and the relative perturbation $\varepsilon_\mathbf{A}^{(K)}$ is associated with matrix $\mathbf{E}$. Define the constant*

$$\tilde{\delta}_{K,\max} \triangleq (1+\delta_K)\left(1+\varepsilon_\mathbf{A}^{(K)}\right)^2 - 1, \tag{15}$$

*then the RIC $\tilde{\delta}_K$ of matrix $\tilde{\mathbf{A}} = \mathbf{A}+\mathbf{E}$ satisfies $\tilde{\delta}_K \le \tilde{\delta}_{K,\max}$.*

As can be seen from Lemma 2, the upper bound of the RIC of perturbed matrix $\tilde{\mathbf{A}}$ is slightly bigger than that of $\mathbf{A}$ if the relative perturbation $\varepsilon_\mathbf{A}^{(K)}$ is small. Notice that $\tilde{\delta}_{K,\max}$ represents a worst-case of $\tilde{\delta}_K$, thus better RIC of $\tilde{\mathbf{A}}$ is normally achieved in practice.

### B. Error Bounds of Greedy Pursuits with Replacement

The relative error bounds of greedy pursuits with replacement under general perturbations for compressible signals are given in this subsection. The following Theorem 2 summarizes the main result.

**Theorem 2** *Suppose $\mathbf{y} = \mathbf{A}\mathbf{x}$, where $\mathbf{x}$ is an arbitrary vector, and the available information used to recover $\mathbf{x}$ is $\tilde{\mathbf{y}} = \mathbf{y} + \mathbf{e}$ and $\tilde{\mathbf{A}} = \mathbf{A} + \mathbf{E}$, where $\mathbf{e}$ and $\mathbf{E}$ denote measurement perturbation and system perturbation, respectively. If the available perturbed sensing matrix $\tilde{\mathbf{A}}$ satisfies RIP with*

$$\tilde{\delta}_{bK} \le c, \tag{16}$$

*and the non-perturbed matrix $\mathbf{A}$ satisfies RIP of order $K$ with $\delta_K$, then in the $l$-th iteration, the relative error of the solution $\mathbf{x}^{[l]}$ of greedy pursuits with replacement satisfies*

$$\begin{aligned}\frac{\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2}{\|\mathbf{x}\|_2} \le\, & a\tilde{C}^l + r_K + \tilde{D}\sqrt{1+\delta_K}\Big[\varepsilon_\mathbf{y} + \varepsilon_\mathbf{A}^{(K)} \\ & + (1+\varepsilon_\mathbf{y})(r_K + s_K)\Big],\end{aligned} \tag{17}$$

*where the specific values of the constants $a$, $b$, $c$, $\tilde{C} < 1$, $\tilde{D}$ are illustrated in TABLE I and TABLE II, respectively.*

*Furthermore, after at most*

$$l = \left\lceil \log_{\tilde{C}} \left( \frac{\varepsilon_\mathbf{y} + \varepsilon_\mathbf{A}^{(K)} + s_K}{a} \right) \right\rceil \tag{18}$$

*iterations, the greedy pursuits estimate $\mathbf{x}$ with accuracy*

$$\begin{aligned}\frac{\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2}{\|\mathbf{x}\|_2} \le & \left(\tilde{D}\sqrt{1+\delta_K} + 1\right) \\ & \cdot \left[\varepsilon_\mathbf{y} + \varepsilon_\mathbf{A}^{(K)} + (1+\varepsilon_\mathbf{y})(r_K + s_K)\right].\end{aligned} \tag{19}$$

For exact sparse signals, a better and more intuitive result can be derived from Theorem 2 by setting $r_K$ and $s_K$ to zero. The result is stated as Theorem 3.

TABLE II
THE SPECIFICATION OF THE CONSTANTS

| | CoSaMP | SP | IHT |
|---|---|---|---|
| $\tilde{C}$ | $\frac{4\tilde{\delta}_{4K}}{(1-\tilde{\delta}_{4K})^2}$ | $\frac{2\tilde{\delta}_{3K}+2\tilde{\delta}_{3K}^2}{(1-\tilde{\delta}_{3K})^3}$ | $\sqrt{8}\tilde{\delta}_{3K}$ |
| $\tilde{D}$ | $\frac{6+2\tilde{\delta}_{4K}}{1-6\tilde{\delta}_{4K}+\tilde{\delta}_{4K}^2}$ | $\frac{5-4\tilde{\delta}_{3K}-8\tilde{\delta}_{3K}^2-\tilde{\delta}_{3K}^4}{1-6\tilde{\delta}_{3K}+6\tilde{\delta}_{3K}^2-2\tilde{\delta}_{3K}^3+\tilde{\delta}_{3K}^4}$ | $\frac{2+\tilde{\delta}_{3K}}{1-\sqrt{8}\tilde{\delta}_{3K}}$ |

**Theorem 3** *Suppose $\mathbf{y}=\mathbf{A}\mathbf{x}$, where $\mathbf{x}$ is $K$-sparse, and the available information used to recover $\mathbf{x}$ is $\tilde{\mathbf{y}}=\mathbf{y}+\mathbf{e}$ and $\tilde{\mathbf{A}}=\mathbf{A}+\mathbf{E}$. If the available perturbed sensing matrix $\tilde{\mathbf{A}}$ satisfies RIP with*

$$\tilde{\delta}_{bK} \le c, \tag{20}$$

*and the non-perturbed matrix $\mathbf{A}$ satisfies RIP of order $K$ with $\delta_K$, then in the $l$-th iteration, the relative error of the solution $\mathbf{x}^{[l]}$ of greedy pursuits with replacement satisfies*

$$\frac{\left\|\mathbf{x}-\mathbf{x}^{[l]}\right\|_2}{\|\mathbf{x}\|_2} \le a\tilde{C}^l + \tilde{D}\sqrt{1+\delta_K}\left(\varepsilon_{\mathbf{y}}+\varepsilon_{\mathbf{A}}^{(K)}\right), \tag{21}$$

*where the specific values of the constants $a$, $b$, $c$, $\tilde{C}<1$, and $\tilde{D}$ are illustrated in TABLE II.*

*Furthermore, after at most*

$$l = \left\lceil \log_{\tilde{C}}\left(\frac{\varepsilon_{\mathbf{y}}+\varepsilon_{\mathbf{A}}^{(K)}}{a}\right)\right\rceil \tag{22}$$

*iterations, the greedy pursuits estimate $\mathbf{x}$ with accuracy*

$$\frac{\left\|\mathbf{x}-\mathbf{x}^{[l]}\right\|_2}{\|\mathbf{x}\|_2} \le \left(\tilde{D}\sqrt{1+\delta_K}+1\right)\left(\varepsilon_{\mathbf{y}}+\varepsilon_{\mathbf{A}}^{(K)}\right). \tag{23}$$

### C. Proof of Theorem 2

*Proof:* Recalling the sensing process (5) with general perturbations, it is equivalent to

$$\begin{aligned}\tilde{\mathbf{y}} &= \mathbf{A}\mathbf{x}+\mathbf{e} = \left(\tilde{\mathbf{A}}-\mathbf{E}\right)\left(\mathbf{x}_K+\mathbf{x}_K^c\right)+\mathbf{e}\\ &= \tilde{\mathbf{A}}\mathbf{x}_K + \left(\mathbf{e}-\mathbf{E}\mathbf{x}_K+\mathbf{A}\mathbf{x}_K^c\right).\end{aligned} \tag{24}$$

Define $\tilde{\mathbf{e}}=\mathbf{e}-\mathbf{E}\mathbf{x}_K+\mathbf{A}\mathbf{x}_K^c$ as the error term. According to (10), under certain condition (16) about the RICs of $\tilde{\mathbf{A}}$, the solution $\mathbf{x}^{[l]}$ in the $l$-th iteration satisfies

$$\left\|\mathbf{x}_K-\mathbf{x}^{[l]}\right\|_2 \le a\tilde{C}^l\|\mathbf{x}_K\|_2 + \tilde{D}\|\tilde{\mathbf{e}}\|_2, \tag{25}$$

where $\tilde{C}<1$ and $\tilde{D}$ are constants specified in TABLE II. From the triangle inequality, it can be derived that

$$\left\|\mathbf{x}-\mathbf{x}^{[l]}\right\|_2 \le \|\mathbf{x}-\mathbf{x}_K\|_2 + \left\|\mathbf{x}_K-\mathbf{x}^{[l]}\right\|_2. \tag{26}$$

Substituting (26) into (25), and from the fact that

$$\|\mathbf{x}_K\|_2 \le \|\mathbf{x}\|_2, \tag{27}$$

the error bound in the $l$-th iteration satisfies

$$\left\|\mathbf{x}-\mathbf{x}^{[l]}\right\|_2 \le a\tilde{C}^l\|\mathbf{x}\|_2 + \|\mathbf{x}_K^c\|_2 + \tilde{D}\|\tilde{\mathbf{e}}\|_2. \tag{28}$$

To estimate $\|\tilde{\mathbf{e}}\|_2$, the triangle inequality, Lemma 1 and definition (13) implies

$$\begin{aligned}\|\tilde{\mathbf{e}}\|_2 &\le \|\mathbf{e}\|_2 + \|\mathbf{E}\mathbf{x}_K\|_2 + \|\mathbf{A}\mathbf{x}_K^c\|_2\\ &\le \|\mathbf{e}\|_2 + \|\mathbf{E}\|_2^{(K)}\|\mathbf{x}_K\|_2 + \|\mathbf{A}\|_2^{(K)}\|\mathbf{x}\|_2\left(r_K+s_K\right).\end{aligned} \tag{29}$$

It can be derived that

$$\begin{aligned}\|\mathbf{e}\|_2 \le& \varepsilon_{\mathbf{y}}\|\mathbf{y}\|_2 = \varepsilon_{\mathbf{y}}\|\mathbf{A}\mathbf{x}\|_2 \le \varepsilon_{\mathbf{y}}\left(\|\mathbf{A}\mathbf{x}_K\|_2+\|\mathbf{A}\mathbf{x}_K^c\|_2\right)\\ \le& \varepsilon_{\mathbf{y}}\|\mathbf{A}\|_2^{(K)}\|\mathbf{x}\|_2\left(1+r_K+s_K\right),\end{aligned} \tag{30}$$

and

$$\|\mathbf{E}\|_2^{(K)} \le \varepsilon_{\mathbf{A}}^{(K)}\|\mathbf{A}\|_2^{(K)}. \tag{31}$$

Substituting (30) and (31) into (29), and together with (27) and (28), the inequality (17) can be obtained.

For the second part of the theorem, notice that when (18) holds, it is obvious that

$$\begin{aligned}a\tilde{C}^l + r_K \le& \varepsilon_{\mathbf{y}}+\varepsilon_{\mathbf{A}}^{(K)}+r_K+s_K\\ \le& \varepsilon_{\mathbf{y}}+\varepsilon_{\mathbf{A}}^{(K)}+\left(1+\varepsilon_{\mathbf{y}}\right)\left(r_K+s_K\right)\end{aligned} \tag{32}$$

and (19) follows immediately, which completes the proof of Theorem 2. ■

### D. Discussion

In this subsection, several remarks are drawn to have a deep insight into the results of this paper.

**Remark 3** As can be seen from (19), the relative error of greedy pursuits with replacement is proportional to both kinds of perturbations and approximation error of $\mathbf{x}$ to $K$-sparse signal. If the original signal is $K$-sparse and the sensing process is non-perturbed, according to (21) with $\varepsilon_{\mathbf{y}}=\varepsilon_{\mathbf{A}}^{(K)}=0$, the relative error is bounded by an exponential decay function of iteration number, which indicates that the recovery solution can approach the original signal at any given precision. For exact $K$-sparse signal $\mathbf{x}$ sensed under general perturbations, (23) demonstrates that the recovery accuracy is limited by the size of both perturbations, and the recovery performance is stable against general perturbations. If the sensing process is non-perturbed for general signal $\mathbf{x}$, according to (19) with $\varepsilon_{\mathbf{y}}=\varepsilon_{\mathbf{A}}^{(K)}=0$, the recovery accuracy is determined by how well it can be approximated with $K$-sparse signal.

**Remark 4** Under the assumption (16), the base $\tilde{C}$ of the exponential function in (17) is less than one, which guarantees the convergence of the recovery error. As $\tilde{\delta}_{bK}\to c$, the base $\tilde{C}$ approaches one and the constant $\tilde{D}$ approaches infinity. Also, due to the monotonicity of RIC, for less sparse signal, i.e. larger $K$, the constant $\tilde{D}$ gets larger, which means the proportionality constant is larger.

For these three greedy pursuits with replacement, $K$ is quite a significant parameter and needs to be known a priori. An improper selection of $K$ may result in great loss of their recovery performance. If $K$ is selected too large, the condition (16) can hardly be satisfied, and the parameter $\tilde{D}$ may be quite large. On the other hand, too small $K$ indicates large $r_K$ and $s_K$, which also leads to poor performance.

As a typical compressible signal, strong-decaying signal $\mathbf{x}$ is a vector whose ordered coefficients satisfy

$$|\mathbf{x}|_{(l)} \geq p\,|\mathbf{x}|_{(l+1)}\,, \quad 1 \leq l \leq N-1, \tag{33}$$

where $|\mathbf{x}|_{(l)}$ is the $l$-th largest magnitude among the elements of $\mathbf{x}$, and $p > 1$ is a constant controls the speed of the decay: the larger $p$ is, the faster $\mathbf{x}$ decays. Simple calculation implies that

$$r_K \leq p^{-K}, \quad s_K \leq \frac{\sqrt{p+1}}{\sqrt{K(p-1)}} p^{-K}. \tag{34}$$

For compressible signal satisfies a power law, i.e.

$$|\mathbf{x}|_{(l)} \approx R \cdot l^{-p}, \quad 1 \leq l \leq N, \tag{35}$$

where $R$ is a positive constant denoting the radius of weak-$\ell_{1/p}$ ball, and $p > 1$ controls the speed of the decay. It can also be calculated that

$$r_K \approx K^{1/2-p}, \quad s_K \approx \frac{\sqrt{2p-1}}{p-1} K^{1/2-p}. \tag{36}$$

In fact, the parameter $K$ should be adjusted according to $\varepsilon_{\mathbf{y}}$, $\varepsilon_{\mathbf{A}}^{(K)}$ and the decay parameter $p$. In the scenario with relatively large perturbations, according to (19), $K$ can be selected a small value such that $\tilde{\delta}_{bK}$ and $\tilde{D}$ are small, and $r_K$ and $s_K$ are comparable with $\varepsilon_{\mathbf{y}}$ and $\varepsilon_{\mathbf{A}}^{(K)}$. In the scenario with relatively small general perturbations, the recovery error is mainly determined by $r_K$ and $s_K$, and $K$ is a trade-off parameter between these ratios and $\tilde{D}$.

**Remark 5** Considering the sensing process (4) with $\tilde{\mathbf{A}} = \mathbf{A} + \mathbf{E}$,

$$\tilde{\mathbf{y}} = (\mathbf{A}+\mathbf{E})\mathbf{x} + \mathbf{e} = \mathbf{A}\mathbf{x}_K + \left(\mathbf{e} + \mathbf{E}\mathbf{x}_K + \tilde{\mathbf{A}}\mathbf{x}_K^c\right). \tag{37}$$

Define $\tilde{\mathbf{e}} = \mathbf{e} + \mathbf{E}\mathbf{x}_K + \tilde{\mathbf{A}}\mathbf{x}_K^c$ as the error term. Following the steps of proof of Theorem 2, it can be derived that if the sensing matrix $\mathbf{A}$ satisfies RIP with $\delta_{bK} \leq c$, then

$$\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2 \leq aC^l \|\mathbf{x}\|_2 + \|\mathbf{x}_K^c\|_2 + D\,\|\tilde{\mathbf{e}}\|_2\,. \tag{38}$$

Since

$$\|\tilde{\mathbf{e}}\|_2 \leq \|\mathbf{e}\|_2 + \|\mathbf{E}\|_2^{(K)} \|\mathbf{x}_K\|_2 + \left\|\tilde{\mathbf{A}}\right\|_2^{(K)} \|\mathbf{x}\|_2 \,(r_K + s_K)$$

and the fact that

$$\left\|\tilde{\mathbf{A}}\right\|_2^{(K)} \leq \|\mathbf{A}\|_2^{(K)} + \|\mathbf{E}\|_2^{(K)} \leq \left(1 + \varepsilon_{\mathbf{A}}^{(K)}\right) \|\mathbf{A}\|_2^{(K)}, \tag{39}$$

it can be derived that the relative error of the solution in the $l$-th iteration obeys

$$\begin{aligned}\frac{\left\|\mathbf{x} - \mathbf{x}^{[l]}\right\|_2}{\|\mathbf{x}\|_2} \leq & aC^l + r_K + D\sqrt{1+\delta_K}\Big[\varepsilon_{\mathbf{y}} + \varepsilon_{\mathbf{A}}^{(K)} \\ & + \left(1 + \varepsilon_{\mathbf{y}} + \varepsilon_{\mathbf{A}}^{(K)}\right)(r_K + s_K)\Big].\end{aligned} \tag{40}$$

Notice that in this scenario the error bounds of greedy pursuits with replacement are also proportional to the relative perturbations of both sensing matrix and measurement vector, which indicates that the recovery performance is stable against general perturbations. Also, it should be stressed that for both scenarios, the demands of RIP are all for the available sensing matrix in the process of recovery.

## IV. COMPARISON WITH ORACLE RECOVERY

In this section, the upper and lower bound of oracle recovery is derived, and is compared with those of greedy pursuits with replacement. Then it is shown that the results in this paper are optimal up to the coefficients.

### *A. Error Bound of Oracle Recovery*

Consider the oracle recovery where the locations of the $K$ largest entries in magnitude of a vector $\mathbf{x}$ are known a priori. Assume $\mathrm{T}$ is the set of the $K$ locations, i.e. $\mathrm{T} = \mathrm{supp}(\mathbf{x}_K)$.

Recall the sensing process (5) where both perturbations exist. Through least squares (LS) method, the estimated solution $\hat{\mathbf{x}}$ of oracle recovery is obtained by

$$\hat{\mathbf{x}}_{\mathrm{T}} = \tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\tilde{\mathbf{y}}, \quad \hat{\mathbf{x}}_{\mathrm{T}^c} = \mathbf{0}. \tag{41}$$

It is easy to check that

$$\hat{\mathbf{x}}_{\mathrm{T}} = \tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\tilde{\mathbf{y}} = \tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\left(\tilde{\mathbf{A}}\mathbf{x}_K + \tilde{\mathbf{e}}\right) = \mathbf{x}_{\mathrm{T}} + \tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\tilde{\mathbf{e}}. \tag{42}$$

Thus the estimation error of the LS solution obeys

$$\begin{aligned}\|\mathbf{x} - \hat{\mathbf{x}}\|_2^2 &= \|\mathbf{x}_{\mathrm{T}} - \hat{\mathbf{x}}_{\mathrm{T}}\|_2^2 + \|\mathbf{x}_{\mathrm{T}^c} - \hat{\mathbf{x}}_{\mathrm{T}^c}\|_2^2 \\ &= \left\|\tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\tilde{\mathbf{e}}\right\|_2^2 + \|\mathbf{x}_K^c\|_2^2\,.\end{aligned} \tag{43}$$

According to (43), the estimation error obeys

$$\begin{aligned}\|\mathbf{x} - \hat{\mathbf{x}}\|_2 &\leq \left\|\tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\tilde{\mathbf{e}}\right\|_2 + \|\mathbf{x}_K^c\|_2 \\ &\leq \left\|\tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\right\|_2 \|\tilde{\mathbf{e}}\|_2 + \|\mathbf{x}_K^c\|_2\,.\end{aligned} \tag{44}$$

Substituting (29) into (44) and from the fact that

$$\left\|\tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\right\|_2 \leq \frac{1}{\sqrt{1-\tilde{\delta}_K}} \triangleq \hat{D}, \tag{45}$$

the relative error of LS solution is derived following the steps in the proof of Theorem 2

$$\begin{aligned}\frac{\|\mathbf{x} - \hat{\mathbf{x}}\|_2}{\|\mathbf{x}\|_2} \leq & \left(\hat{D}\sqrt{1+\delta_K} + 1\right) \\ & \cdot \Big[\varepsilon_{\mathbf{y}} + \varepsilon_{\mathbf{A}}^{(K)} + (1+\varepsilon_{\mathbf{y}})(r_K + s_K)\Big].\end{aligned} \tag{46}$$

Comparing (46) with (19), it can be derived that after finite iterations, the error bounds of greedy pursuits with replacement and the error bound of oracle recovery only differ in coefficients. The error bounds of LS solution and greedy pursuits with replacement are all on the same order of the noise level and approximation error

$$O\left(\varepsilon_{\mathbf{y}} + \varepsilon_{\mathbf{A}}^{(K)} + (1+\varepsilon_{\mathbf{y}})(r_K + s_K)\right) \tag{47}$$

under general perturbations.

### *B. Lower Bound Analysis of Oracle Recovery*

According to (28) and (29), after

$$l = \left\lceil \log_{\tilde{C}}\left(\frac{\|\mathbf{e}\|_2 + \|\mathbf{E}\|_2^{(K)}\|\mathbf{x}_K\|_2}{a\|\mathbf{A}\|_2^{(K)}\|\mathbf{x}\|_2}\right)\right\rceil$$

iterations, the recovery error of greedy pursuits with replacement satisfies

$$\left\|\mathbf{x}-\mathbf{x}^{[l]}\right\|_2 \le \left(\tilde{D}+\frac{1}{\sqrt{1-\delta_K}}\right)\Big[\left\|\mathbf{e}\right\|_2+\left\|\mathbf{E}\right\|_2^{(K)}\left\|\mathbf{x}_K\right\|_2 + \left\|\mathbf{A}\right\|_2^{(K)}\left\|\mathbf{x}\right\|_2\left(r_K+s_K\right)\Big]. \quad (48)$$

To show the optimality of the results in this paper, we prove that for some $\mathbf{e}$, $\mathbf{E}$ and $\mathbf{x}$, the lower bound of estimation error of oracle recovery is also dependent on the following three terms

$$\left\|\mathbf{e}\right\|_2, \quad \left\|\mathbf{E}\right\|_2^{(K)}\left\|\mathbf{x}_K\right\|_2, \quad \left\|\mathbf{A}\right\|_2^{(K)}\left\|\mathbf{x}\right\|_2\left(r_K+s_K\right), \quad (49)$$

which denote measurement perturbation, system perturbation and approximation error, respectively.

According to (43), the estimation error obeys

$$\left\|\mathbf{x}-\hat{\mathbf{x}}\right\|_2 \ge \left\|\tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\tilde{\mathbf{e}}\right\|_2 \ge \frac{\left\|\tilde{\mathbf{e}}\right\|_2}{\sqrt{1+\tilde{\delta}_K}}, \quad (50)$$

where the second inequality is due to the fact that

$$\lambda_{\min}\left(\tilde{\mathbf{A}}_{\mathrm{T}}^{\dagger}\right) \ge \frac{1}{\sqrt{1+\tilde{\delta}_K}},$$

where $\lambda_{\min}$ denotes the smallest singular value.

In particular, the system perturbation $\mathbf{E}$ can be chosen such that

$$\left\|\mathbf{E}\mathbf{x}_K\right\|_2 = \left\|\mathbf{E}\right\|_2^{(K)}\left\|\mathbf{x}_K\right\|_2. \quad (51)$$

Meanwhile, it can be assumed that

$$\left(-\mathbf{E}\mathbf{x}_K\right)^*\left(\mathbf{A}\mathbf{x}_K^c\right) \ge 0, \quad (52)$$

otherwise $-\mathbf{E}$ is applied and (51) still holds. Furthermore, the measurement perturbation $\mathbf{e}$ can be chosen to be orthogonal to $\mathbf{E}\mathbf{x}_K$ and $\mathbf{A}\mathbf{x}_K^c$. Due to the above assumptions, it can be obtained that

$$\begin{aligned}\left\|\tilde{\mathbf{e}}\right\|_2 &\ge \sqrt{\left\|\mathbf{e}\right\|_2^2+\left\|\mathbf{E}\mathbf{x}_K\right\|_2^2+\left\|\mathbf{A}\mathbf{x}_K^c\right\|_2^2}\\ &\ge \frac{1}{\sqrt{3}}\left(\left\|\mathbf{e}\right\|_2+\left\|\mathbf{E}\mathbf{x}_K\right\|_2+\left\|\mathbf{A}\mathbf{x}_K^c\right\|_2\right). \quad (53)\end{aligned}$$

For the case that $\mathbf{x}_K^c$ is $K$-sparse, according to Cauchy-Schwartz inequality

$$\left\|\mathbf{x}_K^c\right\|_2 \ge \frac{\left\|\mathbf{x}_K^c\right\|_1}{\sqrt{K}}, \quad (54)$$

it is derived that

$$\begin{aligned}\left\|\mathbf{A}\mathbf{x}_K^c\right\|_2 &\ge \sqrt{1-\delta_k}\left\|\mathbf{x}_K^c\right\|_2 \ge \frac{\sqrt{1-\delta_k}}{2}\left(\left\|\mathbf{x}_K^c\right\|_2+\frac{\left\|\mathbf{x}_K^c\right\|_1}{\sqrt{K}}\right)\\ &\ge \frac{\sqrt{1-\delta_k}}{2\sqrt{1+\delta_k}}\left\|\mathbf{A}\right\|_2^{(K)}\left\|\mathbf{x}\right\|_2\left(r_K+s_K\right). \quad (55)\end{aligned}$$

Substituting (51) and (55) into (53), and according to (50), the estimation error of oracle recovery is lower bounded by

$$\left\|\mathbf{x}-\hat{\mathbf{x}}\right\|_2 \ge \hat{D}_1\Big[\left\|\mathbf{e}\right\|_2+\left\|\mathbf{E}\right\|_2^{(K)}\left\|\mathbf{x}_K\right\|_2 + \left\|\mathbf{A}\right\|_2^{(K)}\left\|\mathbf{x}\right\|_2\left(r_K+s_K\right)\Big], \quad (56)$$

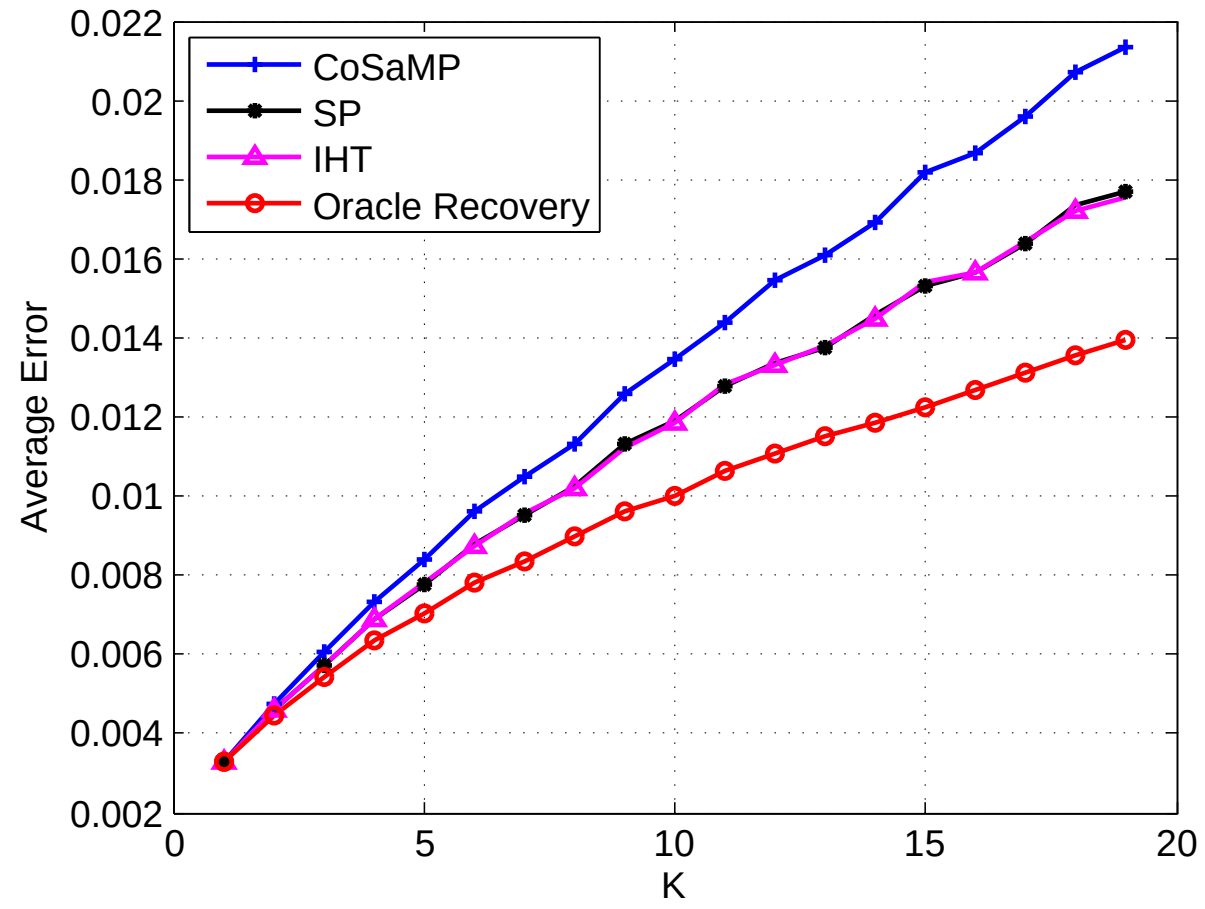

Fig. 1. Average relative error (1000 trials) of greedy pursuits with replacement and oracle LS recovery versus sparsity level $K$ when $\varepsilon_{\mathbf{A}} = 0.05$ and $\varepsilon_{\mathbf{y}} = 0.05$. The RIP condition seems to be satisfied in this scenario.

where

$$\hat{D}_1 = \frac{1}{\sqrt{3}\sqrt{1+\tilde{\delta}_K}}\cdot\frac{\sqrt{1-\delta_K}}{2\sqrt{1+\delta_K}}. \quad (57)$$

Comparing (56) with (48), it can be concluded that there exist $\mathbf{x}$, $\mathbf{e}$, and $\mathbf{E}$ for which the results in this paper are essentially tight up to the coefficients. In general, no recovery algorithms can do better than the oracle least squares method. Thus, the greedy pursuits with replacement: CoSaMP, SP, and IHT, can provide near-oracle recovery performance against general perturbations.

## V. NUMERICAL SIMULATIONS

Three numerical simulations are performed in MATLAB and demonstrated as follows. The first simulation compares the relative error of greedy pursuits with replacement and oracle LS method for different sparsity levels. The second simulation compares the recovery error for different relative perturbations. The final simulation considers compressible signal and presents the influence of parameter $K$ on recovery error.

In each trial a new matrix $\mathbf{A}$ of size $512\times 2048$ is randomly generated with independent Gaussian distributed entries with $\sigma^2 = 1/512$ so that the expectation of the $l_2$ norm of each column is normalized. The nonzero locations of a sparse vector $\mathbf{x}$ are randomly selected among all possible choices, and the nonzero entries are generated independently from normal distribution. Then, for each pair of relative perturbations, $\tilde{\mathbf{A}}$ and $\tilde{\mathbf{y}}$ are generated according to (5) and (14). Notice that only $\varepsilon_{\mathbf{A}}$ is used in the simulations since calculating $\varepsilon_{\mathbf{A}}^{(K)}$ is NP-hard. The replacement is reasonable because $\varepsilon_{\mathbf{A}} \approx \varepsilon_{\mathbf{A}}^{(K)}$ holds for all $K$ with high probability when both $\mathbf{A}$ and $\mathbf{E}$ are random Gaussian matrices [31].

In the first experiment, the relative perturbations are set to $\varepsilon_{\mathbf{A}} = 0.05$ and $\varepsilon_{\mathbf{y}} = 0.05$. The sparsity level $K$ varies from 1 to 25, and the simulation is repeated for 1000 times. Fig. 1 presents the average relative error for the range where the demand for RIP seems to hold. As can be seen from this figure,

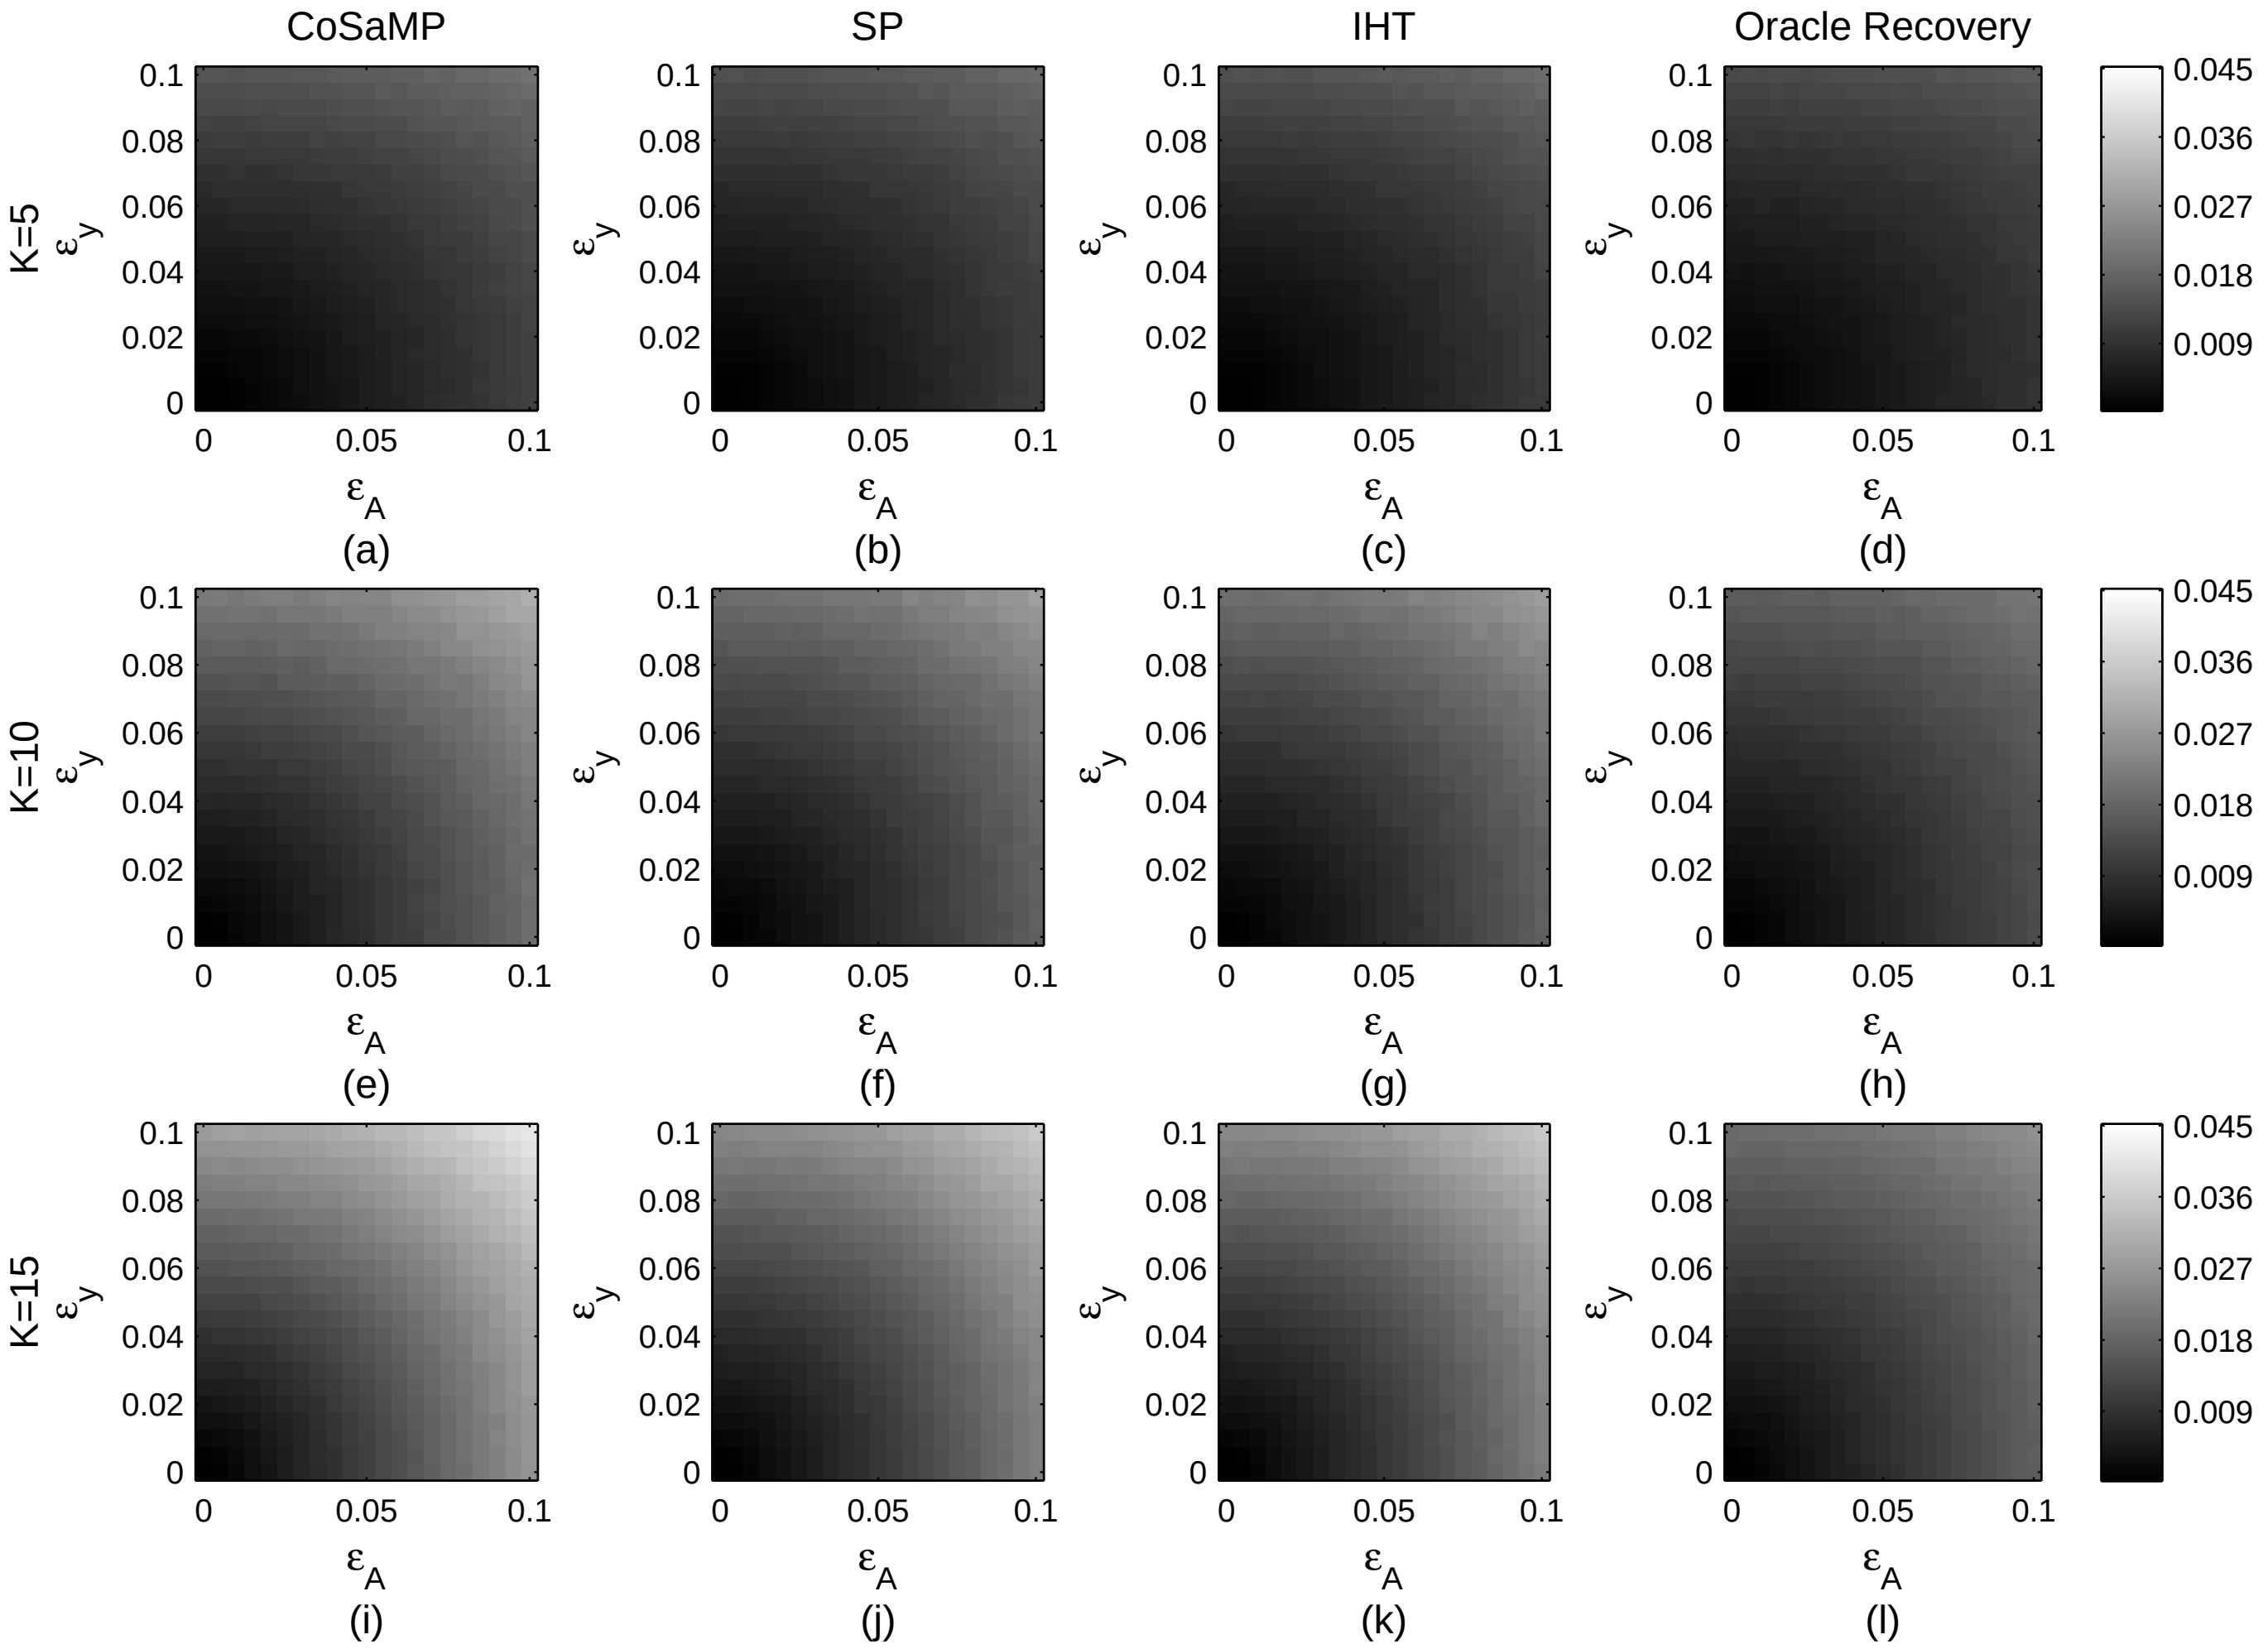

Fig. 2. Average relative error (1000 trials) of greedy pursuits with replacement and oracle LS recovery versus different $\varepsilon_{\mathbf{A}}$ and $\varepsilon_{\mathbf{y}}$. The results are represented for the same $K$ in the same row, and for the same recovery algorithm in the same column, with labels in the left and on the top, respectively.

when $K < 20$, the recovery error increases almost linearly as $K$ increases. When the sparsity level $K$ continues to increase, the recovery performance of IHT cannot be bounded any more, which indicates that the RIP condition is violated.

In the second experiment, for fixed sparsity level $K = 5$, 10 and 15, the relative perturbations $\varepsilon_{\mathbf{A}}$ and $\varepsilon_{\mathbf{y}}$ vary from 0 to 0.1 with step size 0.005, respectively. The simulation is conducted 1000 trials to obtain the average relative error. The results are demonstrated in Fig. 2, where the results are represented for the same $K$ in the same row, and for the same recovery algorithm in the same column, with labels in the left and on the top, respectively. As can be seen from them, for the same $K$, the surface of oracle LS method lies below the others, while the surface of CoSaMP is above on the top. The surfaces of SP and IHT are almost the same in the middle. It verifies that the relative errors of CoSaMP, SP, and IHT are proportional to the measurement perturbation as well as system perturbation, and these greedy pursuits with replacement can provide near-oracle recovery performance. It needs to be pointed out that for the same recovery algorithm, the gradients of these surfaces increase with the increase of $K$, which confirms that the coefficients of error bounds are related to $K$ as discussed in Section III and IV. To display the results more intuitively, the average relative error is plotted versus $\varepsilon_{\mathbf{A}}$ for different $K$ when $\varepsilon_{\mathbf{y}} = 0$, as in Fig. 3. As can be seen, the recovery error scales almost linearly as $\varepsilon_{\mathbf{A}}$, and the slopes of these curves increase as $K$ for the same recovery algorithm.

In the final experiment, we consider compressible signal $\mathbf{x}$ satisfying a power law

$$|\mathbf{x}|_{(l)} = l^{-p}, \quad 1 \le l \le N, \tag{58}$$

where $p = 2$ in this experiment. The relative perturbations are set to $\varepsilon_{\mathbf{A}} = 0.01$ and $\varepsilon_{\mathbf{y}} = 0.01$. The parameter $K$ in the recovery algorithms varies from 5 to 100, and the results are plotted in Fig. 4. Since IHT fails when $K \ge 20$, the recovery error of it is not shown for $K \ge 20$ in the figure. As can be seen from Fig. 4, the optimal $K$ is around 22 for CoSaMP and SP, 19 for IHT, and around 40 for oracle recovery. Too small $K$ or large $K$ will affect the recovery performance for compressible signals, as is discussed in Remark 4. According to (36), for $K = 22$ and $p = 2$, the approximation error $r_K$ is about 0.010, and $s_K$ is about 0.017, which are comparable with $\varepsilon_{\mathbf{A}}$ and $\varepsilon_{\mathbf{y}}$.

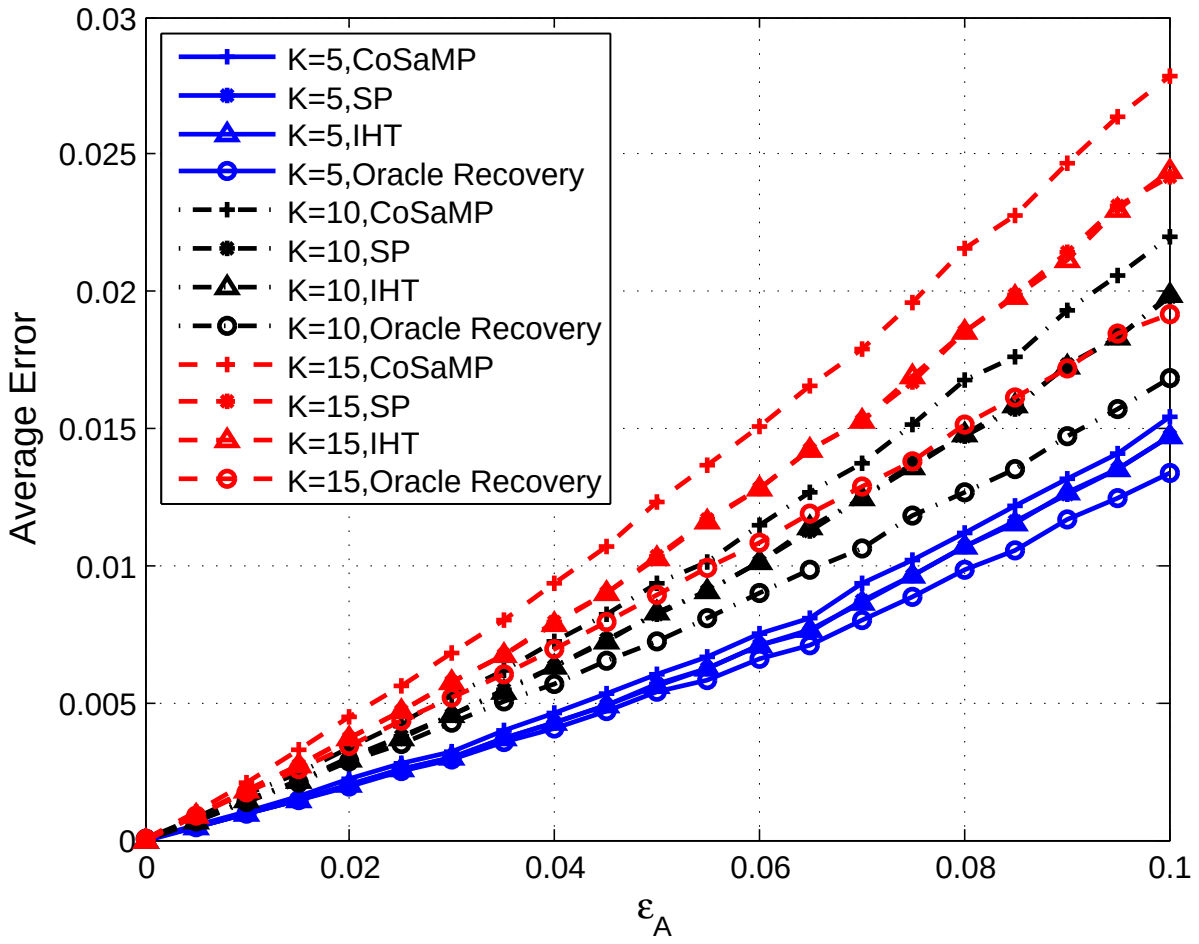

Fig. 3. Average relative error (1000 trials) of greedy pursuits with replacement and oracle LS recovery versus $\varepsilon_{\mathbf{A}}$ for different sparsity level $K$ when $\varepsilon_{\mathbf{y}} = 0$.

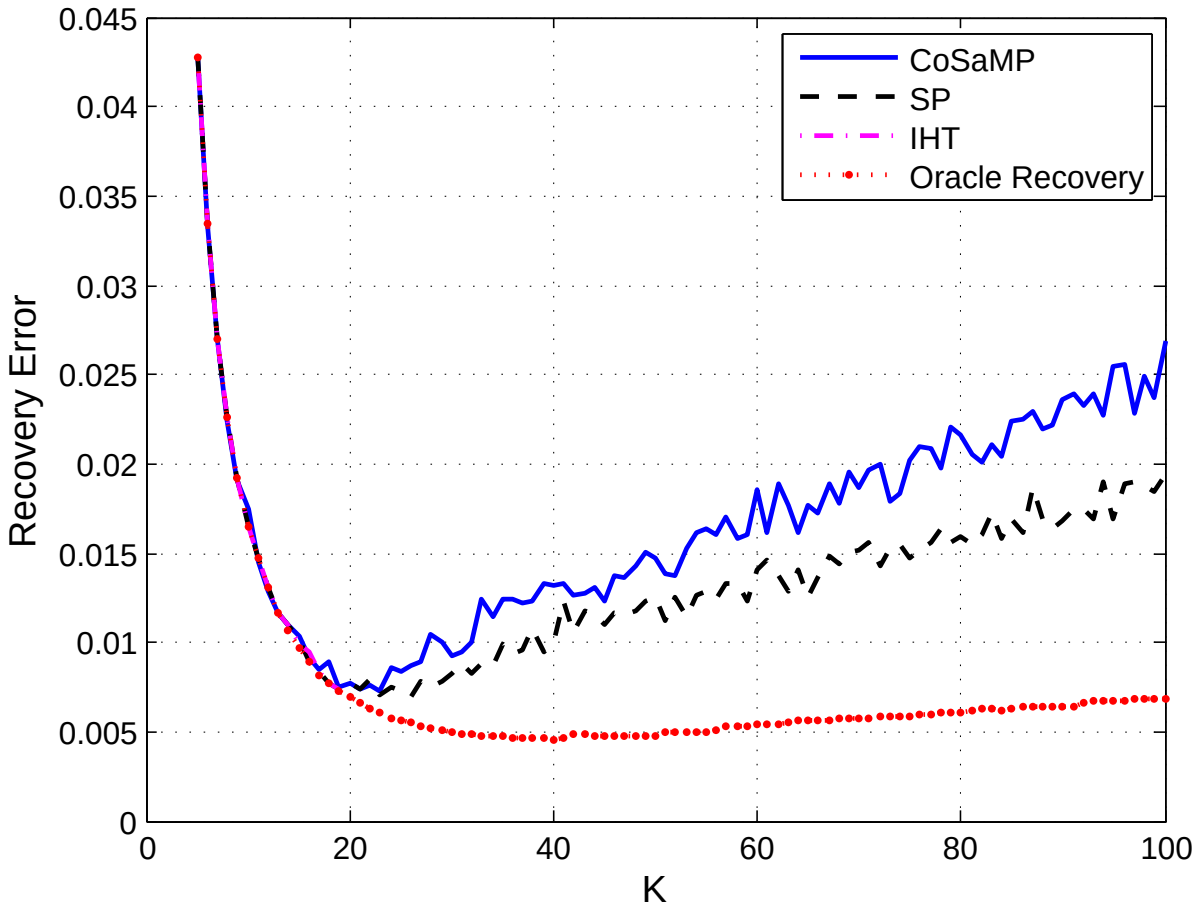

Fig. 4. Relative error of greedy pursuits with replacement and oracle LS recovery for compressible signal versus different parameter $K$ when $\varepsilon_{\mathbf{A}} = 0.01$ and $\varepsilon_{\mathbf{y}} = 0.01$. IHT algorithm becomes invalid when $K \geq 20$, thus it is not plotted for the wider range.

## VI. RELATED WORK

A similar concept of this paper is presented in [28], where the authors also establish a near-oracle performance guarantee for CoSaMP, SP, and IHT algorithms. Based on RIP, the analysis considers the recovery of a $K$-sparse signal with the assumption that the measurement vector is corrupted by additive random white Gaussian noise. The main result of [28] is stated as follows, where some notations are replaced for the sake of consistency.

Assume that the white Gaussian noise vector is with covariance matrix $\sigma^2\mathbf{I}$, and that the columns of sensing matrix $\mathbf{A}$ are normalized. Under certain conditions of RICs and with probability exceeding $1-(\sqrt{\pi(1+a)\log N}\cdot N^a)^{-1}$, it holds that

$$\|\mathbf{x}-\hat{\mathbf{x}}\|_2^2 \leq C^2\cdot(2(1+a)\log N)\cdot K\sigma^2, \tag{59}$$

where $\hat{\mathbf{x}}$ is the recovered signal, and $C$ is a constant related to recovery algorithm, sensing matrix and sparsity level. The result is similar to those for the dantzig-selector and the basis pursuit, but with different constants. The $\log N$ factor in (59) is proven to be unavoidable in [42], therefore this bound is optimal up to a constant factor. The result is also extended to the nearly-sparse case in [28].

Other relevant researches are presented in [32], [33], where the error bounds of CoSaMP and SP are also derived under general perturbations. The analysis is performed following the steps of [31] for basis pursuit. Define

$$\alpha_K = \frac{\|\mathbf{x}-\mathbf{x}_K\|_2}{\|\mathbf{x}_K\|_2},\quad \beta_K = \frac{\|\mathbf{x}-\mathbf{x}_K\|_1}{\sqrt{K}\|\mathbf{x}_K\|_2},\quad \kappa_{\mathbf{A}}^{(K)} = \frac{\sqrt{1+\delta_K}}{\sqrt{1-\delta_K}}.$$

The main result in [32] states that under the conditions that

$$\delta_{4K} \leq \frac{1.1}{(1+\varepsilon_{\mathbf{A}}^{(4K)})^2}-1 \tag{60}$$

and that

$$\alpha_K+\beta_K \leq \frac{1}{2\kappa_{\mathbf{A}}^{(K)}}, \tag{61}$$

the recovered solution of CoSaMP satisfies

$$\begin{aligned}\|\mathbf{x}-\hat{\mathbf{x}}\|_2 \leq C\cdot\Big(&\|\mathbf{x}-\mathbf{x}_K\|_2+\frac{1}{\sqrt{K}}\|\mathbf{x}-\mathbf{x}_K\|_1+\|\mathbf{e}\|_2\\ &+(\|\mathbf{E}\|_2\alpha_K+\|\mathbf{E}\|_2^{(K)})\|\mathbf{y}\|_2\Big).\end{aligned} \tag{62}$$

Further define

$$\varepsilon_{\mathbf{A},K,\mathbf{y}} \triangleq \left(\frac{\varepsilon_{\mathbf{A}}^{(K)}\kappa_{\mathbf{A}}^{(K)}+\varepsilon_{\mathbf{A}}\gamma_{\mathbf{A}}\alpha_K}{1-\kappa_{\mathbf{A}}^{(K)}(\alpha_K+\beta_K)}+\varepsilon_{\mathbf{y}}\right)\|\mathbf{y}\|_2, \tag{63}$$

where

$$\gamma_{\mathbf{A}} = \frac{\|\mathbf{A}\|_2}{\sqrt{1-\delta_K}}. \tag{64}$$

The main result in [33] states that under the conditions that

$$\delta_{3K} \leq \frac{1.083}{(1+\varepsilon_{\mathbf{A}}^{(3K)})^2}-1 \tag{65}$$

and that

$$\alpha_K+\beta_K < \frac{1}{\kappa_{\mathbf{A}}^{(K)}}, \tag{66}$$

the recovered solution of SP satisfies

$$\begin{aligned}\|\mathbf{x}-\hat{\mathbf{x}}\|_2 \leq &(C_K^{''}+1)\|\mathbf{x}-\mathbf{x}_K\|_2+C_K^{''}\frac{\|\mathbf{x}-\mathbf{x}_K\|_1}{\sqrt{K}}\\ &+C_K^{'}\varepsilon_{\mathbf{A},K,\mathbf{y}}.\end{aligned} \tag{67}$$

Our analysis, on the other hand, derives a unified form of the error bounds of CoSaMP, SP, and IHT under general perturbations. Specified in Theorem 2, for compressible signals, when measurement vector and sensing matrix are perturbed, under the condition of (16), the error bound of recovered solution in each iteration is derived as (17). It is also proved that after finite iterations, the error bound is proportional to both perturbations and approximation error, as in (19). The result is compared with oracle recovery, where the locations of $K$ largest entries in magnitude are known a priori. It is also proved that for some certain $\mathbf{x}$, $\mathbf{e}$, and $\mathbf{E}$, the lower bound of oracle recovery only differs in coefficients from the error bounds of greedy pursuits with replacement. Therefore, the near-oracle recovery performance of them is guaranteed in this work.

The main difference between [28] and this work is that we consider a more general completely perturbed scenario, and the optimality of the recovery performance is also in this sense. Compared with [32], [33], the demand of RIP in our work is for the perturbed sensing matrix $\tilde{\mathbf{A}}$ other than $\mathbf{A}$, which is due to the fact that only $\tilde{\mathbf{A}}$ is available for recovery. Also, the demand of RICs is with a constant parameter here. In addition, the condition such as (61) or (66) is not required in our assumption. Our result is compared with oracle recovery and shown to be optimal up to the coefficients, and it is verified by plentiful numerical simulations.

## VII. CONCLUSION

In this paper, the error bounds of three greedy pursuits with replacement under general perturbations are derived. It is shown that these bounds are proportional to both perturbations, which leads to the stability of these algorithms against general perturbations. Furthermore, these error bounds are compared with that of oracle LS solution with the locations of $K$ largest entries in magnitude known a priori. Since the error bounds of CoSaMP, SP, and IHT algorithms are on the same order of the lower bound of oracle solution for some certain signal and perturbations, it can be concluded that these greedy pursuits with replacement can provide near-oracle recovery performance against general perturbations. Numerical simulations verify that the recovery errors of these greedy pursuits are proportional to both perturbations, and they exhibit near-oracle recovery performance. Discussions and simulations also reveal how moderate parameter $K$ achieves better recovery performance for compressible signals.

## APPENDIX A
## PROOF OF THEOREM 1 FOR SP ALGORITHM

Several facts about the SP algorithm are firstly introduced and proved in [21], thus they are stated here without proofs.

**Lemma 3** *(Lemma 3 in [21]) Let* $\mathbf{x} \in \mathbb{R}^N$ *be a* $K$*-sparse vector, and let* $\tilde{\mathbf{y}} = \mathbf{A}\mathbf{x} + \mathbf{e}$ *be a perturbed measurement vector for which* $\mathbf{A} \in \mathbb{R}^{M\times N}$ *satisfies the RIP with parameter* $\delta_K$*. For an arbitrary* $\hat{\mathrm{T}} \subset \{1,\ldots,N\}$ *such that* $|\hat{\mathrm{T}}| \le K$*, define* $\hat{\mathbf{x}}$ *as*

$$\hat{\mathbf{x}}_{\hat{\mathrm{T}}} = \mathbf{A}_{\hat{\mathrm{T}}}^{\dagger}\tilde{\mathbf{y}}, \quad \hat{\mathbf{x}}_{\hat{\mathrm{T}}^c} = \mathbf{0}. \tag{68}$$

*Then*

$$\|\mathbf{x} - \hat{\mathbf{x}}\|_2 \le \frac{1}{1-\delta_{3K}}\left\|\mathbf{x}_{\mathrm{T}-\hat{\mathrm{T}}}\right\|_2 + \frac{1+\delta_{3K}}{1-\delta_{3K}}\|\mathbf{e}\|_2. \tag{69}$$

**Lemma 4** *(Theorem 10 in [21]) It holds that*

$$\left\|\mathbf{x}_{\mathrm{T}-\tilde{\mathrm{T}}^l}\right\|_2 \le \frac{2\delta_{3K}}{(1-\delta_{3K})^2}\left\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^{l-1}}\right\|_2 + \frac{2(1+\delta_{3K})}{1-\delta_{3K}}\|\mathbf{e}\|_2,$$

$$\left\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^l}\right\|_2 \le \frac{1+\delta_{3K}}{1-\delta_{3K}}\left\|\mathbf{x}_{\mathrm{T}-\tilde{\mathrm{T}}^l}\right\|_2 + \frac{2}{1-\delta_{3K}}\|\mathbf{e}\|_2.$$

*and therefore*

$$\left\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^l}\right\|_2 \le \frac{2\delta_{3K}+2\delta_{3K}^2}{(1-\delta_{3K})^3}\left\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^{l-1}}\right\|_2 + \frac{4(1+\delta_{3K})}{(1-\delta_{3K})^2}\|\mathbf{e}\|_2.$$

Lemma 4 directly implies inequality (9). It's easy to check that if $\delta_{3K} \le 0.206$, then $C < 1$, and

$$\begin{aligned}\left\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^l}\right\|_2 &\le C^l\left\|\mathbf{x}_{\mathrm{T}-\mathrm{T}^0}\right\|_2 + \frac{C_1}{1-C}\|\mathbf{e}\|_2\\ &\le C^l\|\mathbf{x}\|_2 + \frac{C_1}{1-C}\|\mathbf{e}\|_2.\end{aligned} \tag{70}$$

Applying Lemma 3 to (70) and with the fact that $\delta_{3K} \le 0.206$, inequality (10) can be derived.

## REFERENCES

[1] E. Candès, J. Romberg, and T. Tao, "Robust uncertainty principles: Exact signal reconstruction from highly incomplete frequency information," *IEEE Trans. Information Theory*, vol. 52, no. 2, pp. 489-509, Feb. 2006.

[2] D. Donoho, "Compressed sensing," *IEEE Trans. Information Theory*, vol. 52, no. 4, pp. 1289-1306, Apr. 2006.

[3] E. Candès and T. Tao, "Near-optimal signal recovery from random projections: Universal encoding strategies?" *IEEE Trans. Information Theory*, vol. 52, no. 12, pp. 5406-5425, Dec. 2006.

[4] S. Chen, D. Donoho, and M. Saunders, "Atomic decomposition by basis pursuit," *SIAM Journal on Scientific Computing*, vol. 20, no. 1, pp. 33-61, Aug. 1998.

[5] E. Candès and T. Tao, "Decoding by linear programming," *IEEE Trans. Information Theory*, vol. 51, no. 12, pp. 4203-4215, Dec. 2005.

[6] E. Candès, "The restricted isometry property and its implications for compressed sensing," *Comptes Rendus Mathematique*, vol. 346, no. 9-10, pp. 589-592, May 2008.

[7] T. Cai, L. Wang, and G. Xu, "New bounds for restricted isometry constants," *IEEE Trans. Information Theory*, vol. 56, no. 9, pp. 4388-4394, Sept. 2010.

[8] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge, U.K.: Cambridge University Press, 2004.

[9] S. Kim, K. Koh, M. Lusig, S. Boyd, and D. Gorinevsky, "An interior-point method for large-scale $\ell_1$-regularized least squares," *IEEE Journal Selected Topics Signal Processing*, vol. 1, no. 4, pp. 606-617, Dec. 2007.

[10] M. Osborne, B. Presnell, and B. Turlach, "A new approach to variable selection in least squares problems," *IMA Journal Numerical Analysis*, vol. 20, no. 3, pp. 389-403, July 2000.

[11] B. Efron, T. Hastie, I. Johnstone, and R. Tibshirani, "Least angle regression," *Annals of Statistics*, vol. 32, no. 2, pp. 407-499, Apr. 2004.

[12] I. Gorodnitsky and B. Rao, "Sparse signal reconstruction from limited data using FOCUSS: A re-weighted minimum norm algorithm," *IEEE Trans. Signal Processing*, vol. 45, no. 3, pp. 600-616, Mar. 1997.

[13] R. Chartrand and W. Yin, "Iteratively reweighted algorithms for compressive sensing," *Proc. IEEE ICASSP*, pp. 3869-3872, Mar. 2008.

[14] H. Mohimani, M. Babaie-Zadeh, and C. Jutten, "A fast approach for overcomplete sparse decomposition based on smoothed $\ell^0$ norm," *IEEE Trans. Signal Processing*, vol. 57, no. 1, pp. 289-301, Jan. 2009.

[15] J. Jin, Y. Gu, and S. Mei, "A Stochastic gradient approach on compressive sensing signal reconstruction based on adaptive filtering framework," *IEEE Journal Selected Topics Signal Processing*, vol. 4, no. 2, pp. 409-420, Apr. 2010.

[16] R. Chartrand, "Exact reconstruction of sparse signals via nonconvex minimization," *IEEE Signal Processing Letters*, vol. 14, no. 10, pp. 707-710, Oct. 2007.

[17] J. Tropp and A. Gilbert, "Signal recovery from random measurements via orthogonal matching pursuit," *IEEE Trans. Information Theory*, vol. 53, no. 12, pp. 4655-4666, Dec. 2007.

[18] D. Needell and R. Vershynin, "Uniform uncertainty principle and signal recovery via regularized orthogonal matching pursuit," *Foundations of Computational Mathematics*, vol. 9, no. 3, pp. 317-334, June 2009.

[19] D. Donoho, Y. Tsaig, I. Drori, and J. Starck, "Sparse solution of underdetermined linear equations by stagewise orthogonal matching pursuit," *Technical Report*, Mar. 2006.

[20] D. Needell and J. Tropp, "CoSaMP: Iterative signal recovery from incomplete and inaccurate samples," *Applied and Computational Harmonic Analysis*, vol. 26, no. 3, pp. 301-321, May 2009.

[21] W. Dai and O. Milenkovic, "Subspace pursuit for compressive sensing signal reconstruction," *IEEE Trans. Information Theory*, vol. 55, no. 5, pp. 2230-2249, May 2009.

[22] T. Blumensath and M. Davies, "Iterative hard thresholding for compressed sensing," *Applied and Computational Harmonic Analysis*, vol. 27, no. 3, pp. 265-274, Nov. 2009.

[23] T. Blumensath and M. Davies, "Normalized iterative hard thresholding: Guaranteed stability and performance," *IEEE Journal Selected Topics Signal Processing*, vol. 4, no. 2, pp. 298-309, Apr. 2010.

[24] D. Needell and R. Vershynin, "Signal recovery from incomplete and inaccurate measurements via regularized orthogonal matching pursuit," *IEEE Journal of Selected Topics in Signal Processing*, vol. 4, no. 2, pp. 310-316, Apr. 2010.

[25] E. Candès and T. Tao, "The dantzig selector: Statistical estimation when $p$ is much larger than $n$," *Annals of Statistics*, vol. 35, no. 6, pp. 2313-2351, Dec. 2007.

[26] P. Bickel, Y. Ritov, and A. Tsybakov, "Simultaneous analysis of lasso and dantzig selector," *Annals of Statistics*, vol. 37, no. 4, pp. 1705-1732, Aug. 2009.

[27] Z. Ben-Haim, Y. Eldar, and M. Elad, "Coherence-based performance guarantees for estimating a sparse vector under random noise," *IEEE Trans. Signal Processing*, vol. 58, no. 10, pp. 5030-5043, Oct. 2010.

[28] R. Giryes and M. Elad, "RIP-based near-oracle performance guarantees for subspace-pursuit, CoSaMP, and iterative hard-thresholding," available online: http://arxiv.org/abs/1005.4539.

[29] I. Rish and G. Grabarnik, "Sparse signal recovery with exponential-family noise," *Allerton Conference on Communication, Control, and Computing*, pp. 60-66, Sept. 2009.

[30] M. Raginsky, R. Willett, Z. Harmany, and R. Marcia, "Compressed sensing performance bounds under poisson noise," *IEEE Trans. Signal Processing*, vol. 58, no. 8, pp. 3990-4002, Aug. 2010.

[31] M. Herman and T. Strohmer, "General deviants: An analysis of perturbations in compressed sensing," *IEEE Journal of Selected Topics in Signal Processing*, vol. 4, no. 2, pp. 342-349, Apr. 2010.

[32] M. Herman and D. Needell, "Mixed operators in compressed sensing," *Conference on Information Sciences and Systems*, pp. 1-6, Mar. 2010.

[33] Q. Wang and Z. Liu, "Sampling matrix perturbation analysis of subspace pursuit for compressive sensing," *Communications in Computer and Information Science*, vol. 86, pp. 581-588, 2011.

[34] A. Aldroubi, X. Chen, and A. Powell, "Perturbations of measurement matrices and dictionaries in compressed sensing," available online: http://citeseer.ist.psu.edu/viewdoc/summary?doi=10.1.1.190.5078.

[35] J. Ding, L. Chen, and Y. Gu, "Performance analysis of orthogonal matching pursuit under general perturbations," available online: http://arxiv.org/abs/1106.3373.

[36] Y. Chi, L. Scharf, A. Pezeshki, and A. Calderbank, "Sensitivity to basis mismatch in compressed sensing," *IEEE Trans. Signal Processing*, vol. 59, no. 5, pp. 2182-2195, May 2011.

[37] H. Zhu, G. Leus, and G. Giannakis, "Sparsity-cognizant total least-squares for perturbed compressive sampling," *IEEE Trans. Signal Processing*, vol. 59, no. 5, pp. 2002-2016, May 2011.

[38] J. Blanchard, C. Cartis, and J. Tanner, "Compressed sensing: How sharp is the restricted isometry property?" available online: http://arxiv.org/abs/1004.5026.

[39] B. Bah and J. Tanner, "Improved bounds on restricted isometry constants for Gaussian matrices," available online: http://arxiv.org/abs/1003.3299.

[40] W. Dai and O. Milenkovic, "Subspace pursuit for compressive sensing: Closing the gap between performance and complexity," available online: http://citeseer.ist.psu.edu/viewdoc/summary?doi=10.1.1.154.8384.

[41] T. Blumensath and M. Davies, "Iterative thresholding for sparse approximations," *Journal of Fourier Analysis and Applications*, vol. 14, no. 5-6, pp. 629-654, Dec. 2008.

[42] E. Candès, "Modern statistical estimation via oracle inequalities," *Acta Numerica*, vol. 15, pp. 257-325, May 2006.